



OUTDOOR ANTI-VANDAL HD IP DOME

720p
HIGH DEFINITION

Your next High Definition IP **MEGAPIXEL** Security Camera is here!

ECL-IPD5

This could be the only outdoor IP camera you'll ever need!

STROBE Deterrent LED

High-visibility white light LED strobes every 2 seconds to show camera location and power-on status. Use it as a crime deterrent and to increase awareness of your business at night. Can be turned off.



Digital wide dynamic range



Heavy-duty construction



MICRO SD CARD SLOT



Dynamic noise reduction



High Light Compensation



MEGAPIXEL LENS



Auto-tracking white balance




Backlight compensation



H264 & ONVIF


EASY TO REACH INTERNAL FEATURES

- **Infrared level** – Turn this control with a flat-blade screwdriver.
- **Strobe LED** – Switch ON or OFF.
- **Micro SD Card Slot** – Insert your formatted micro SD card here.
- **Reset button** – Resets camera to factory default values when pressed.

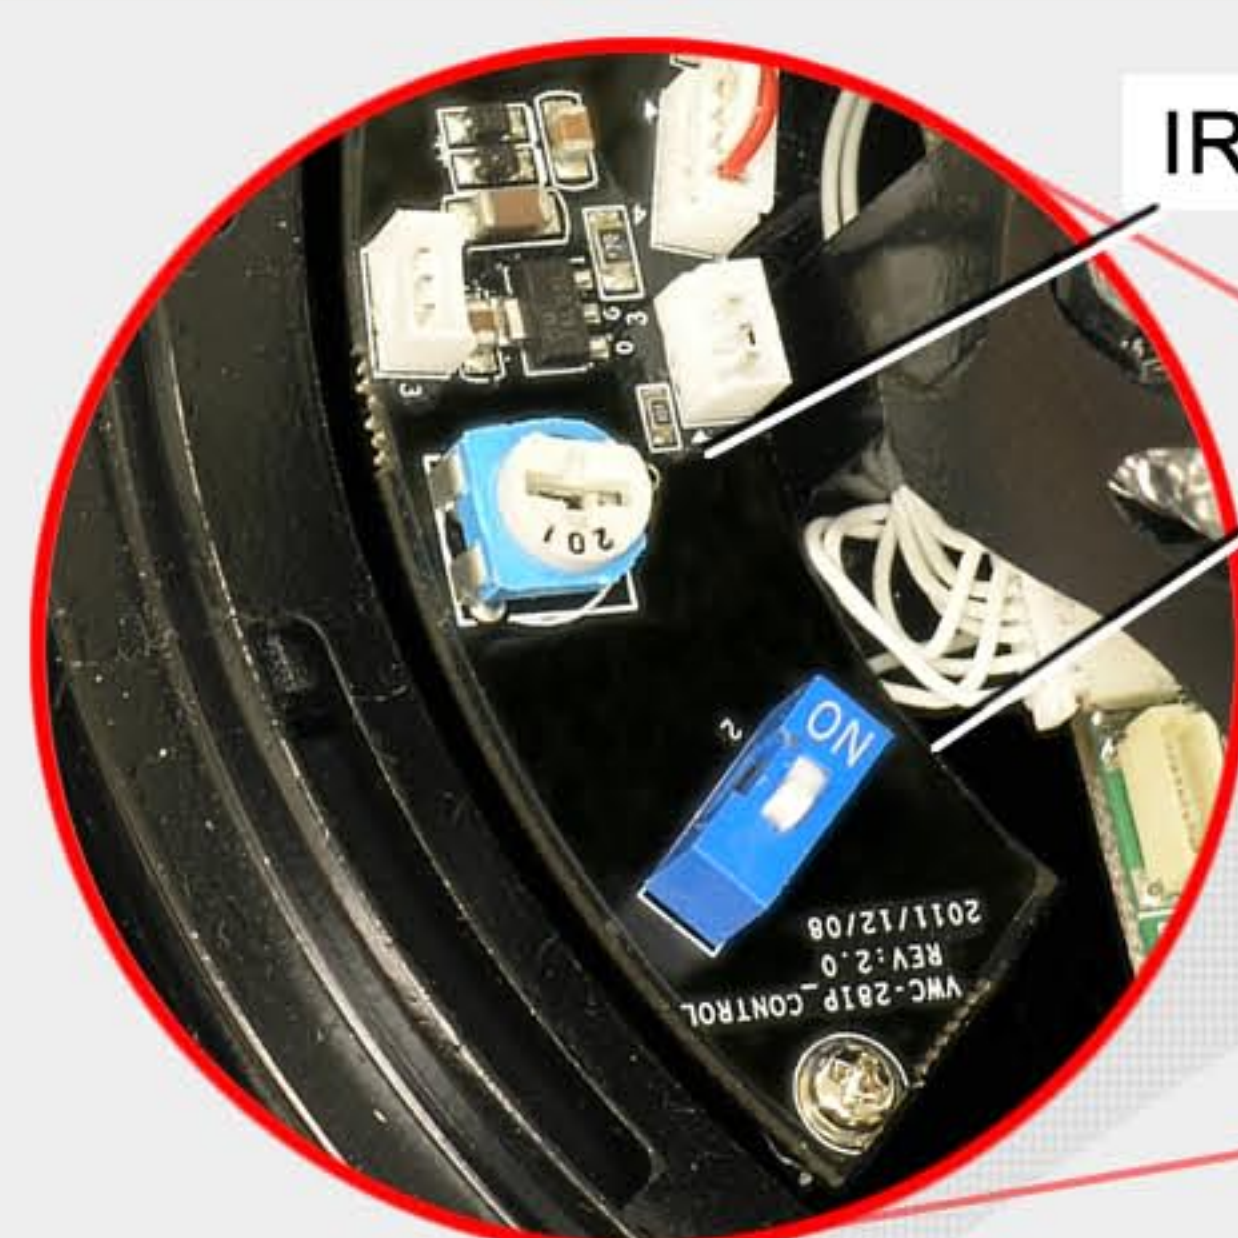

IR LEVEL



STROBE

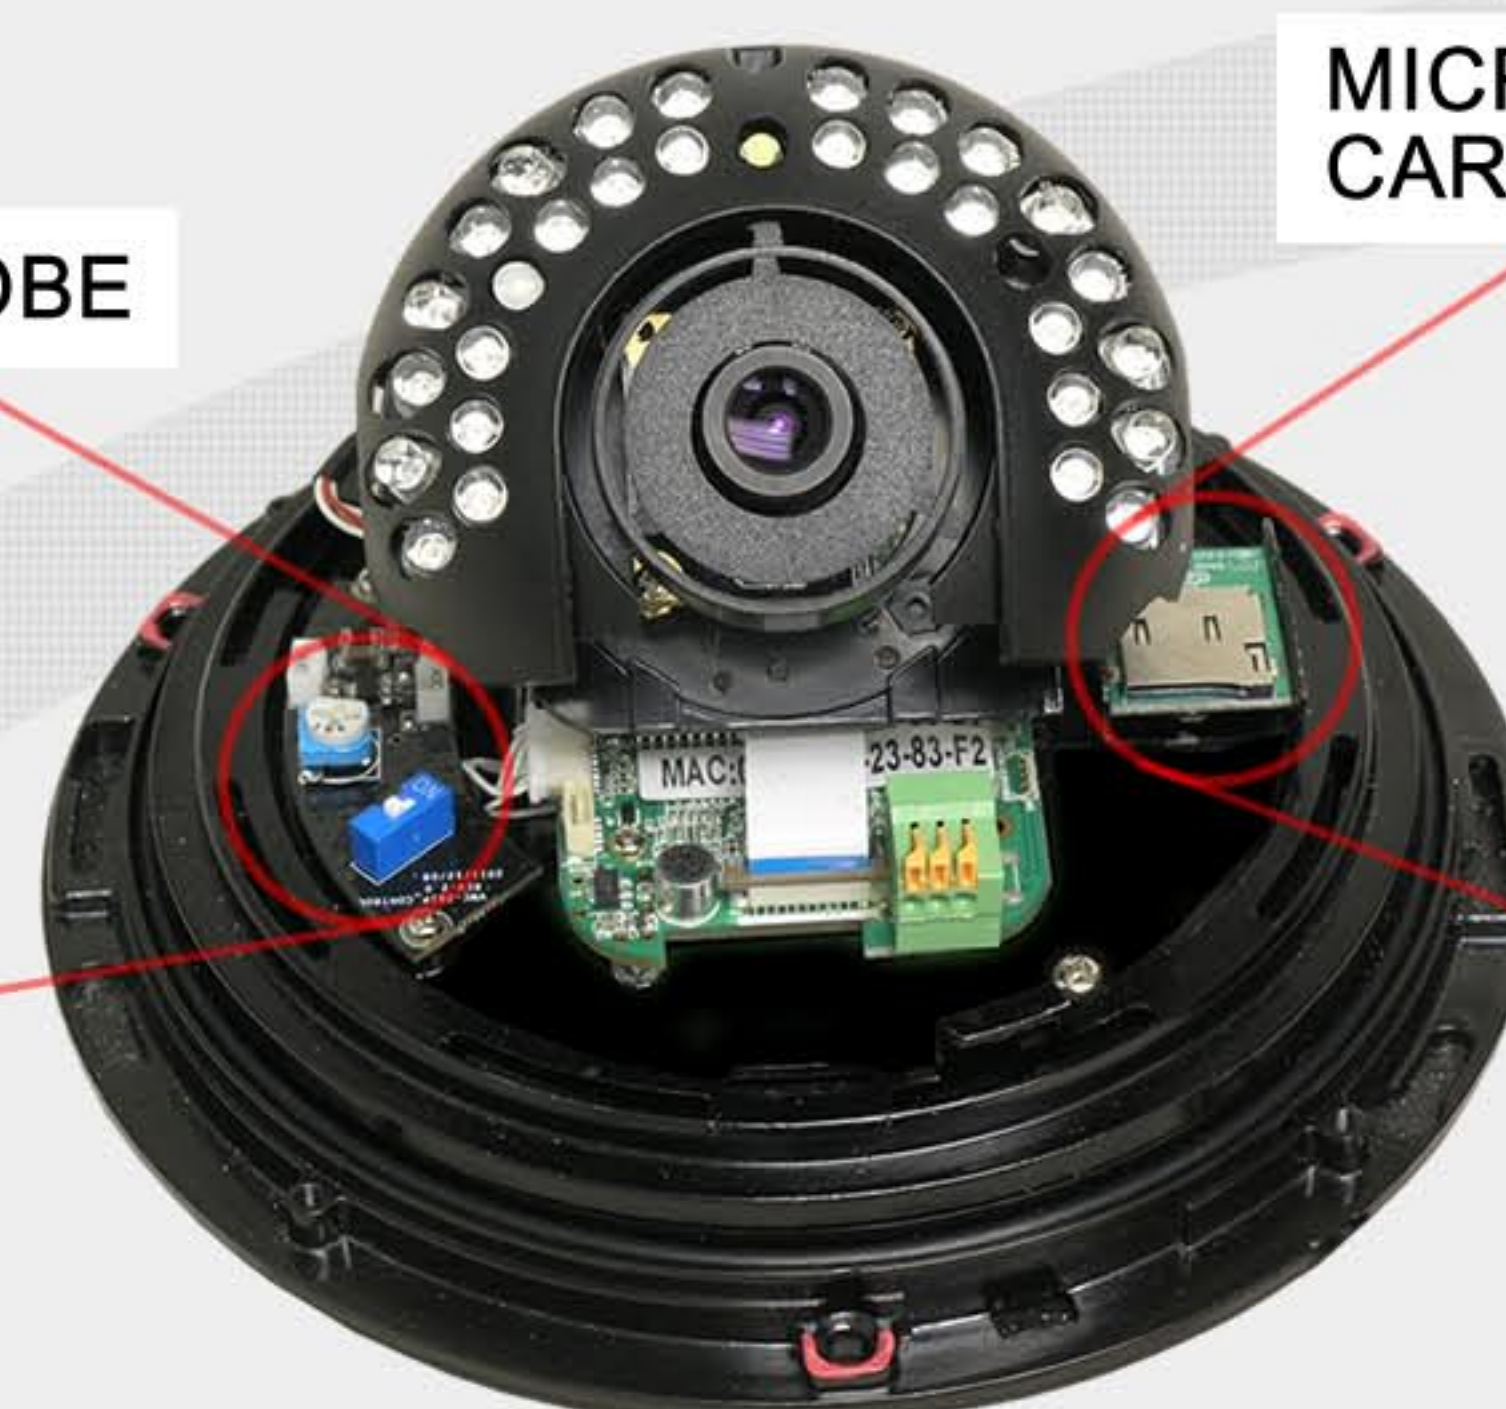

MICRO SD CARD SLOT



RESET BUTTON

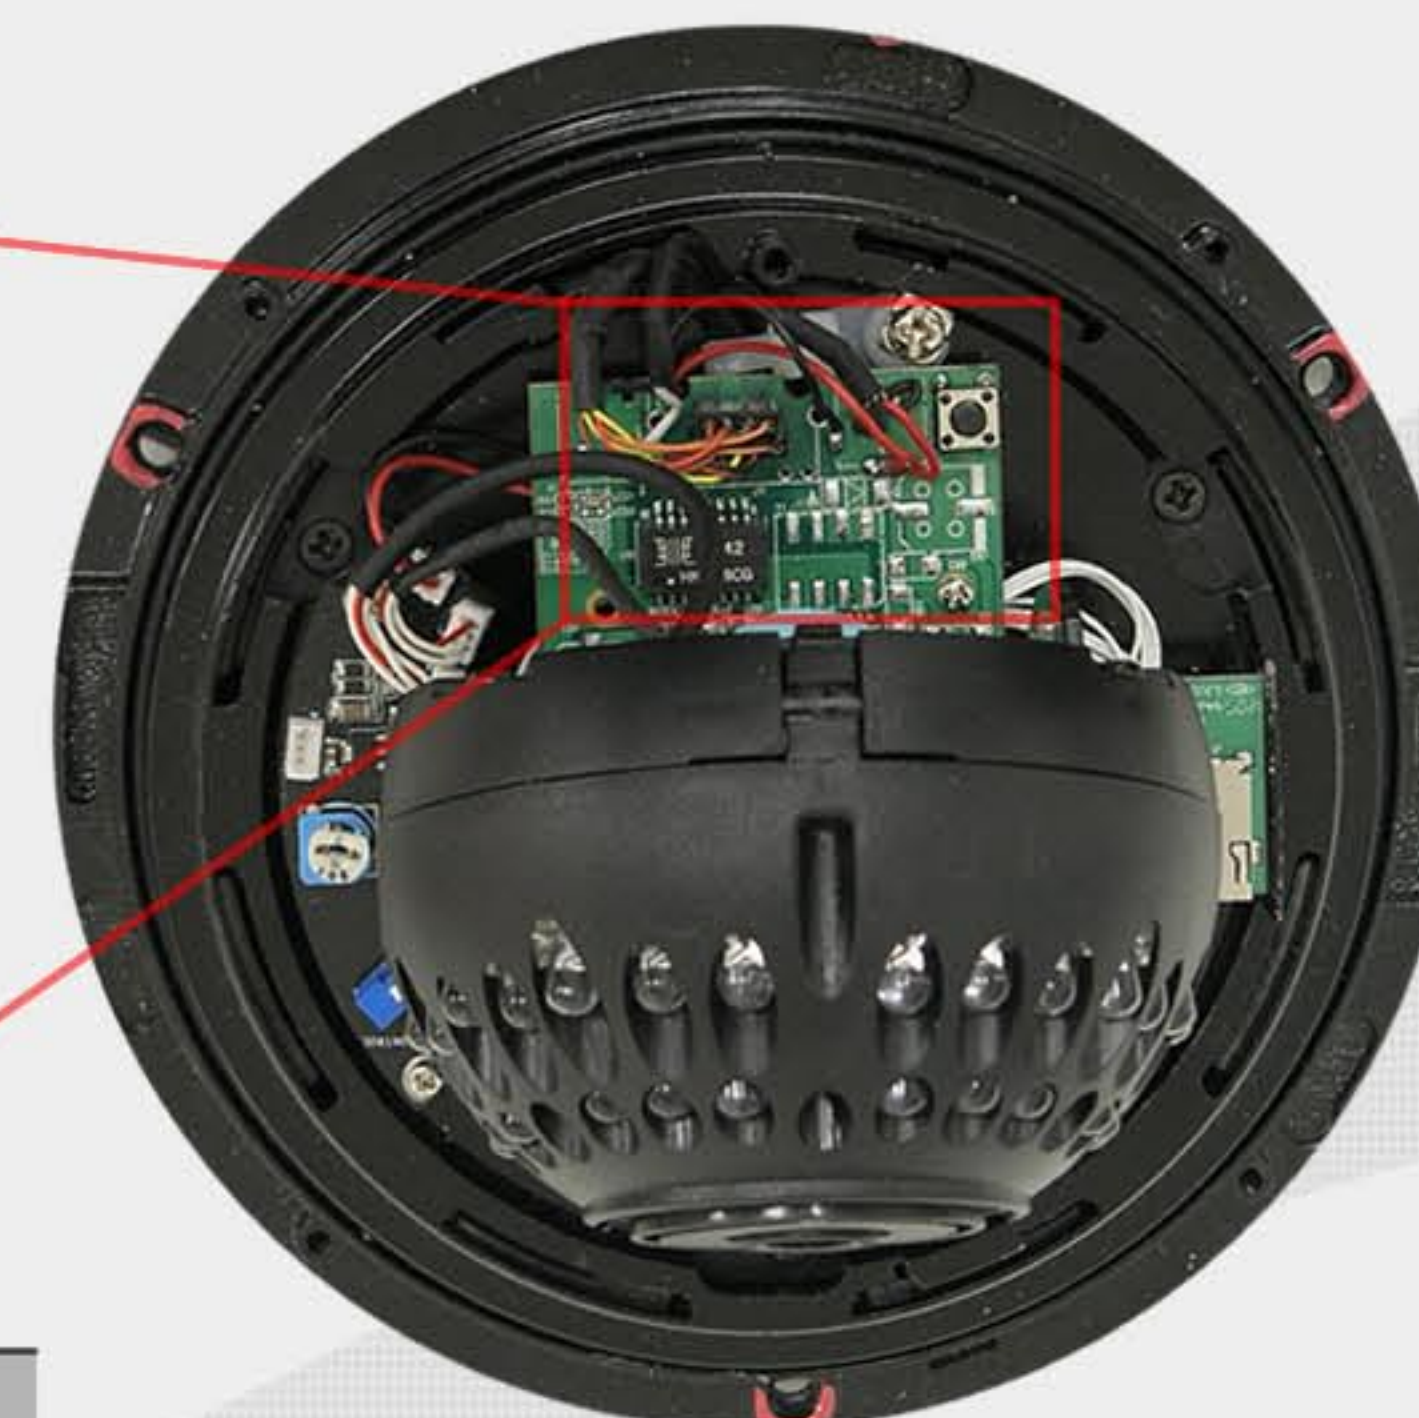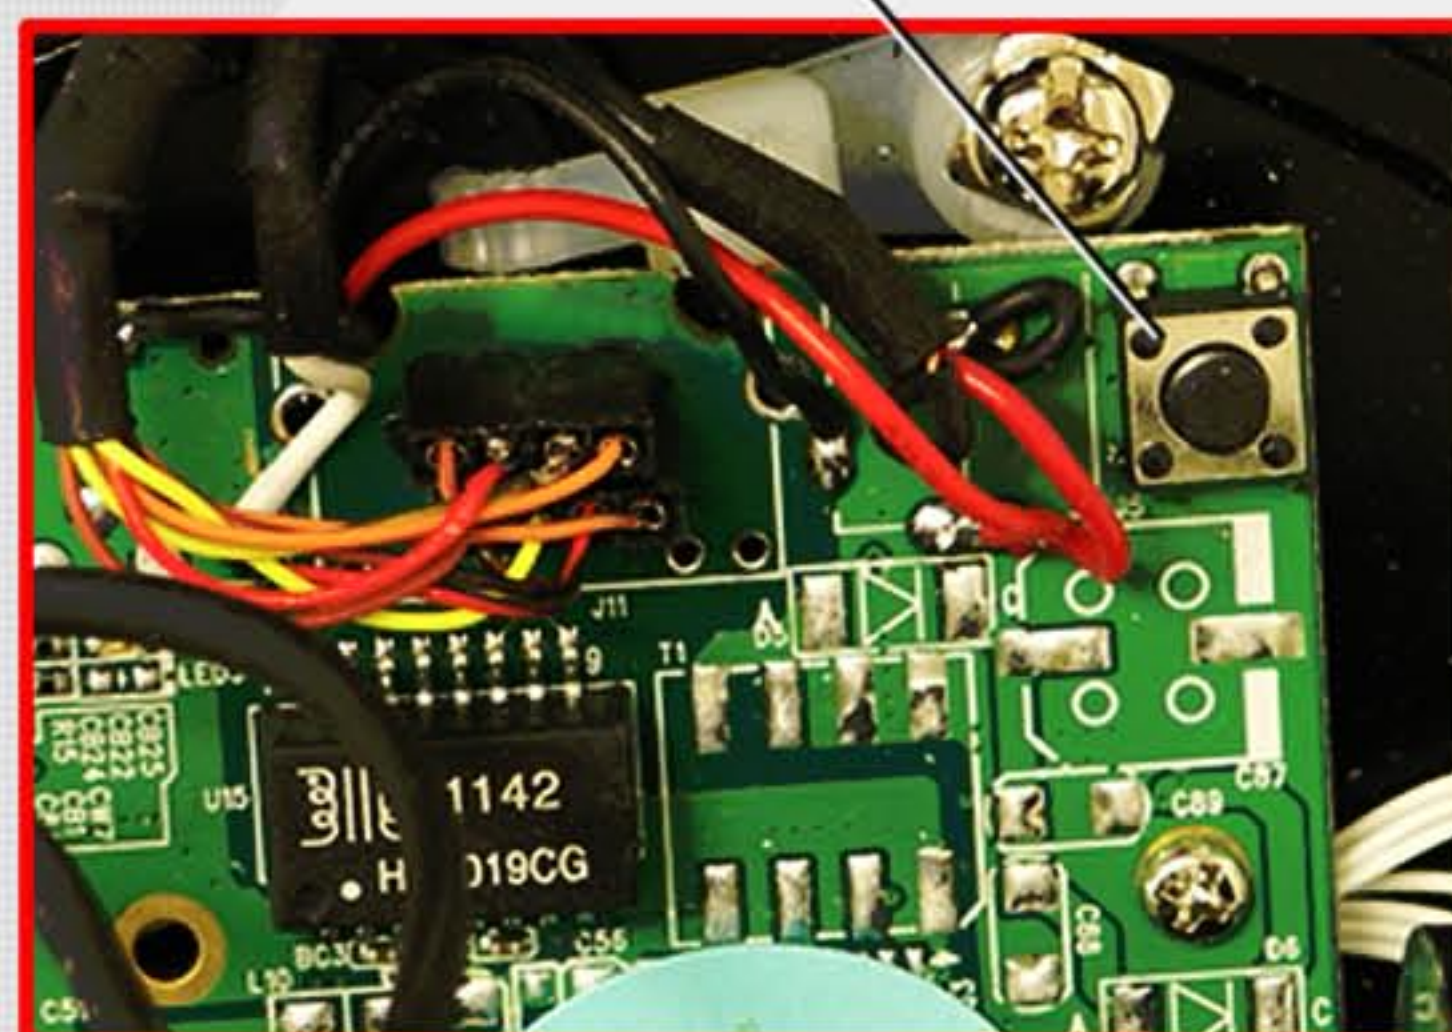

REMOTE VIEWING

This camera offers remote viewing using your computer or compatible device.

Ask a sales representative about the new NEXXA, RAPPIX, & NUBIX digital video recorders!



MICRO SD CARD MANAGEMENT

INITIATE RECORDING: Motion, IP check, Network failure (signal loss), Scheduled, Sensor/Relay

VIDEO FORMAT: AVI & JPEG

PLAYBACK: YES, with DELETE option

SPECIFICATIONS

VIDEO SENSOR	1/4" 1-Megapixel CMOS
RESOLUTION	720p, 1280x720@30fps
LENS	4.2mm, Megapixel rated, IR corrected Aspherical
ILLUMINATION	1.0 LUX @ 30FPS, 0.0 LUX with Infrared ON
INFRARED SYSTEM	Automatic, 28 IR LEDs (850nm), up to 90' (or greater) range with on-board intensity adjustment
COMPRESSION	H.264 / M-JPEG / MPEG4
SHUTTER SPEED	1/5 to 1/10,000 sec.
STREAMING	Triple streaming supported
USER ADJUSTMENTS	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Speed, Sens-Up, D-WDR, Flip, Mirror, Noise Reduction
SNAPSHOT	Yes
FULL SCR. MONITORING	Yes
ZOOM	Yes
PRIVACY MASK	Yes, 3 zones
SENSITIVITY	1.0 LUX @ 30FPS
BITRATE ADJUST	CBR, VBR

ENHANCEMENTS

MOTION DETECTION	Yes, 3 zones
TRIGGER ACTIVITY	eMail, FTP, Save to SD, DO, SAMBA
PRE/POST ALARM	Yes, configurable
# CONNECTIONS	Up to 10 simultaneous connections
SECURITY	Password protect, IP filter, HTTPS encryption, 802.1X port-based authentication for network protection, QoS/DSCP
FIRMWARE UPGRADE	HTTP mode, can be upgraded remotely
RESET BUTTON	Yes, reset to factory configuration

PHYSICAL

OPERATING TEMP.	14°C to 113°F
CASE	Hardened aluminum alloy
ANTI-VANDAL	Tough metal construction, dome built to withstand heavy blows, protected cable routing.
INTERNAL BRACKET	3D gimbaled bracket
DIMENSIONS	6.25" wide at base, 4.5" tall
POWER	12VDC 500mA nominal (IR on)
WEIGHT	1.39 lbs

HARDWARE

CPU	ARM 9, 32-Bit RISC
RAM	128M
FLASH	16M
SENSOR	DI/DO
AUDIO FORMAT	G.711(64k) and G.726(32k, 24k) audio compression with on-board microphone
AUDIO OUTPUT	3.5mm jack
MICROPHONE	Built-in microphone included
2-WAY COMMUNICATION	Supported (requires speaker, not included)
POWER OVER ETHERNET	No

NETWORK

ETHERNET	10/100 Base-T
PROTOCOL	HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, NTP, UPnP, 3GPP, SAMBA
WIRELESS	802.11 n/b/g, with WEP, WPA-PSK, WPA2-PSK