

ECL-IPQ1

MEGAPIXEL IP CAMERA WITH TRIPLE STREAMING



720P



DVD SOFTWARE SUITE

Includes management software, tools and user manual.

MODEL	ECL-IPQ1	
VIDEO SENSOR	1/4" 1M CMOS	
RESOLUTION	At 30fps: 1280x800, 1280x720, 640x480, 320x240, 176x144	
COMPRESSION	H.264 / M-JPEG / MPEG4	
LENS	4.2mm (f 1.8)	
SHUTTER SPEED	1/5 to 1/10,000 sec.	
STREAMING	Triple streaming supported	
USER ADJUSTMENTS	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Speed, Sens-Up, D-WDR, Flip, Mirror, Noise Reduction	
SNAPSHOT	Yes	
FULL SCRN. MONITORING	Yes	
ZOOM	Yes	
PRIVACY MASK	Yes, 3 zones	
SENSITIVITY	1.0 LUX @ 30FPS	
BITRATE ADJUST	CBR, VBR	
HARDWARE		
CPU	ARM 9, 32-Bit RISC	
RAM	128M	
FLASH	16M	
Ю	DI/DO	
AUDIO FORMAT	G.711(64k) and G.726(32k, 24k) audio compression	

Power Connector	Megapixei	LAN Connector
		Speaker Connector

D-WDR, Flip, Mirror, Noise		
Reduction	MICRO SD MANAGEMENT	
Yes	DECODDING TRICCER	Matian datast ID shaels
Yes	RECORDING TRIGGER	Motion detect, IP check, network failure (wired only), schedule, DI
Yes	VIDEO RECORDING	AVI, JPEG
Yes, 3 zones	FORMAT	
1.0 LUX @ 30FPS	VIDEO PLAYBACK	Yes, capable of DELETE FILE operation
CBR, VBR		
	ENHANCEMEN	TS
ARM 9, 32-Bit RISC	MOTION DETECTION	Yes, 3 zones
128M	TRIGGER ACTIVITY	eMail, FTP, Save to SD, DO, SAMBA
16M	PRE/POST ALARM	Yes, configurable
DI/DO	# CONNECTIONS	Up to 10 simultaneous
G.711(64k) and G.726(32k, 24k) audio compression	# CONNECTIONS	connections
with on-board microphone	SECURITY	Password protect, IP filter, HTTPS encryption, 802.1X port-based authentication for network protection, QoS/DSCP
3.5mm jack		
Built-in microphone included		
Supported (requires speaker, not included)	FIRMWARE UPGRADE	iii iii iiioac, caii bc
No	RESET BUTTON	Yes, reset to factory configuration
	PHYSICAL	
10/100 Base-T	OPERATING TEMP.	14°C to 113°F
HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE	DIMENSIONS	2.3" x 3.7" x 1.8"
802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, NTP, UPnP, 3GPP, SAMBA	WEIGHT	15.5 ounces
802.11 n/b/g , with WEP, WPA-PSK, WPA2-PSK		
·	.,,	

Metal Bracket Included



Connector Micro SD Card Block Slot (card not MAC:00-0F-0D-22-E4-01 MODE: BITTERWINE SHE!. (E
POWER: DC 12V
SYSTEM: BOD / 4.3mm LENS
S/N: 012VPREIBW1180015

Made in Talwan 513.00100005

included)

IP camera technology is perfect for small and large surveillance networks. Hospitals, banks, casinos, convenience stores, nurseries, schools, court rooms, waiting rooms, train stations, docks, port facilities, office buildings, grocery stores and all residential settings can benefit from the crystal clear high quality video an IP camera provides.

AUDIO OUTPUT

COMMUNICATION

MICROPHONE

2-WAY

POWER OVER No

ETHERNET


ETHERNET

PROTOCOL

WIRELESS

NETWORK

Save your video with an NVR such as our Nexxa 9 or one of our hybrid DVRs like the Nubix HD, Nubix HDX, or Rexion series.

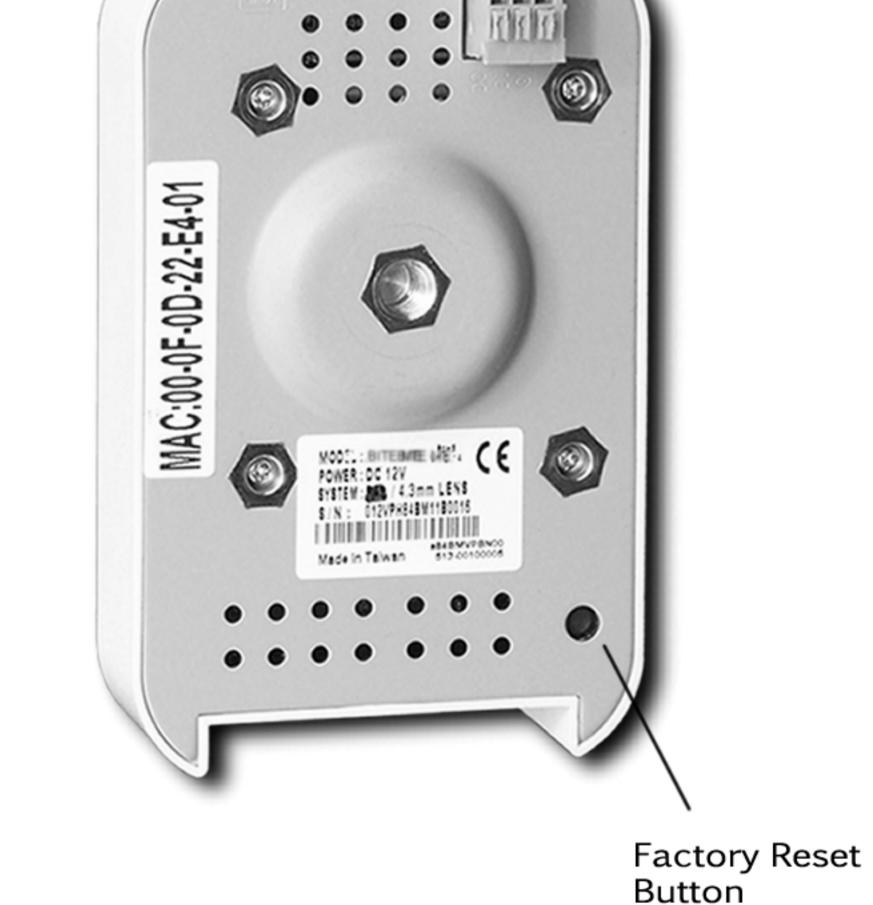

Alarm